



REB ROPE CATALOGUE

OFFICE

FAX

E-MAIL

ADDRESS

011 4529131

011 6094615

deon@rebmarketing.co.za

info@rebmarketing.co.za

15 Imvubu Road, Sebenza, Edenvale

Applications

Commercial Marine

3 Strand Nylon	7
3 Strand Polyester	7
3 Strand Polyethylene	7
3 Strand Polyrene	8
3 Strand Polysteel	8
4 Strand Polyester	8
4 Strand Polyethylene	9
4 Strand Polyrene	9
4 Strand Polysteel	9
8 Strand Nylon	9
8 Strand Polyester	10
8 Strand Polyrene	10
8 Strand Polysteel	10
12 Strand Nylon	11
12 Strand Polyester	11
12 Strand Polyrene	11
12 Strand Polysteel	11
24 Strand Polyrene	12
24 Strand Polysteel	12
Dynaline	14
Spun Polyester Sheet Line	22
Super 12	22
Super 8	22

Fishing

3 Strand Nylon	7
3 Strand Polyester	7
3 Strand Polyethylene	7
3 Strand Polyrene	8
3 Strand Polysteel	8
4 Strand Polyester	8
4 Strand Polyethylene	9
4 Strand Polyrene	9
4 Strand Polysteel	9
8 Strand Nylon	9
8 Strand Polyester	10
8 Strand Polyrene	10
8 Strand Polysteel	10
12 Strand Nylon	11
12 Strand Polyester	11
12 Strand Polyrene	11
12 Strand Polysteel	11
24 Strand Polyrene	12
24 Strand Polysteel	12
Dynaline	14
Mixed Braid	17
Polyethylene Braid	19
Spun Polyester Sheet Line	22

Industrial

3 Strand Nylon	7
3 Strand Polyester	7
3 Strand Polyethylene	7
3 Strand Polyrene	8
3 Strand Polysteel	8
4 Strand Polyester	8
4 Strand Polyethylene	9
4 Strand Polyrene	9
4 Strand Polysteel	9
8 Strand Nylon	9
8 Strand Polyester	10



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

REB ROPE CATALOGUE

8 Strand Polyrene	10
8 Strand Polysteel	10
12 Strand Nylon	11
12 Strand Polyester	11
12 Strand Polyrene	11
12 Strand Polysteel	11
24 Strand Polyrene	12
24 Strand Polysteel	12
Anchor Braid	12
Dynaline	14
Pilot Rope	18
Polyethylene Braid	19
Super 8	22

Leisure Marine

3 Strand Nylon	7
3 Strand Polyester	7
8 Strand Nylon	9
Anchor Braid	12
Anti-Torsion Braid	12
Chafe Covers	13
Dock Line	13
Dynaline	14
Dynalock	14
GP 12	15
GP Braid	15
GP-T Braid	16
Marstrand Yacht Braid	16
Multifilament Polypropylene Braid	17
Nomex Yacht Braid	17
Polyester Braid	18
Polyester Yacht Braid	18
Polylock	19
Riggers Yacht Braid	20
Sheet Line	20
Sheet Line Light	20
Shock Cord	21
Ski Rope	21
Spec-12	21
Spectraspeed	21
Spun Polyester Sheet Line	22
Super 12	22
Super Lite	23
Superbraid	23
Super-T Braid	23
Technora Lite	24
Titan Yacht Braid	24
UHMwPE Kite Line	24
Vec 12	25
Veclock	25
Vectran Lite	25
Vectran Yacht Braid	25

Military

3 Strand Nylon	7
3 Strand Polyester	7
3 Strand Polysteel	8
4 Strand Polyester	8
4 Strand Polysteel	9
8 Strand Nylon	9
8 Strand Polyester	10
8 Strand Polysteel	10
12 Strand Nylon	11
12 Strand Polyester	11
12 Strand Polysteel	11
24 Strand Polysteel	12
Dynaline	14
Fast Rope	15
Kinetic Tow Rope	16



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

REB ROPE CATALOGUE

Mining

3 Strand Manila	7
3 Strand Nylon	7
3 Strand Polyester	7
3 Strand Polysteel	8
4 Strand Polyester	8
4 Strand Polysteel	9
8 Strand Nylon	9
8 Strand Polyester	10
8 Strand Polysteel	10
12 Strand Nylon	11
12 Strand Polyester	11
12 Strand Polysteel	11
24 Strand Polysteel	12
Dynaline	14
Kinetic Tow Rope	16
Super 12	22
Superbraid	23

Safety and Access

Dynamic Access Rope	14
Prusik Braid	19
Response Hot Line	19
Response L.S.K.	20



Fibres

Dyneema

GP 12	15
GP Braid	15
GP-T Braid	16
Nomex Yacht Braid	17

Multifilament Polypropylene

Marstrand Yacht Braid	16
Multifilament Polypropylene Braid	17
Sheet Line Light	20

Natural Fibres

3 Strand Manila	7
-----------------	---

Nomex

Nomex Yacht Braid	17
-------------------	----

Nylon

3 Strand Nylon	7
8 Strand Nylon	9
12 Strand Nylon	11
Dock Line	13
Dynamic Access Rope	14
Nylon Braid	17
Response Hot Line	19
Response L.S.K.	20

Para-Aramid


Anti-Torsion Braid	12
Response Hot Line	19

Polyester

3 Strand Polyester	7
4 Strand Polyester	8
8 Strand Polyester	10
12 Strand Polyester	11
Anchor Braid	12
Dock Line	13
Fast Rope	15
Mixed Braid	17
Pilot Rope	18
Polyester Braid	18
Polyester Yacht Braid	18
Polylock	19
Prusik Braid	19
Response L.S.K.	20
Riggers Yacht Braid	20
Sheet Line Light	20
Shock Cord	21
Spun Polyester Sheet Line	22
Titan Yacht Braid	24

Polyethylene

3 Strand Polyethylene	7
4 Strand Polyethylene	9
Basket Braid	13

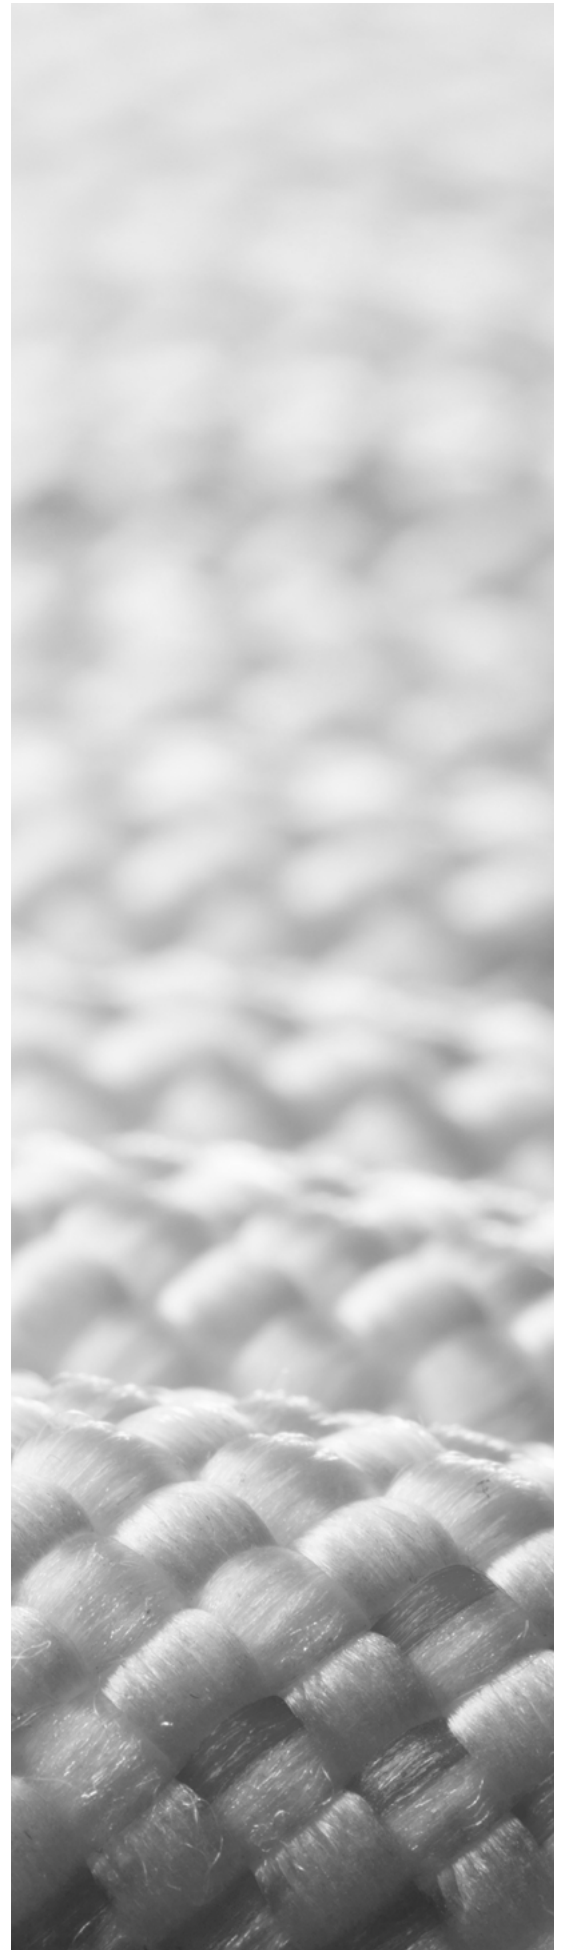

E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

REB ROPE CATALOGUE

Mixed Braid	17
Polyethylene Braid	19
Ski Rope	21

Polyrene

3 Strand Polyrene	8
4 Strand Polyrene	9
8 Strand Polyrene	10
12 Strand Polyrene	11
24 Strand Polyrene	12

Polysteel

3 Strand Polysteel	8
4 Strand Polysteel	9
8 Strand Polysteel	10
12 Strand Polysteel	11
24 Strand Polysteel	12

Technora


Chafe Covers	13
GP-T Braid	16
Technora Braid	23
Technora Lite	24

UHMwPE

Chafe Covers	13
Dynaline	14
Dynalock	14
Nomex Yacht Braid	17
Spectraspeed	21
Superbraid	23
Super 8	22
Super 12	22
Super Lite	23
UHMwPE Kite Line	24

Vectra

Anti-Torsion Braid	12
Chafe Covers	13
Vec 12	25
Veclock	25
Vectran Lite	25
Vectran Yacht Braid	25

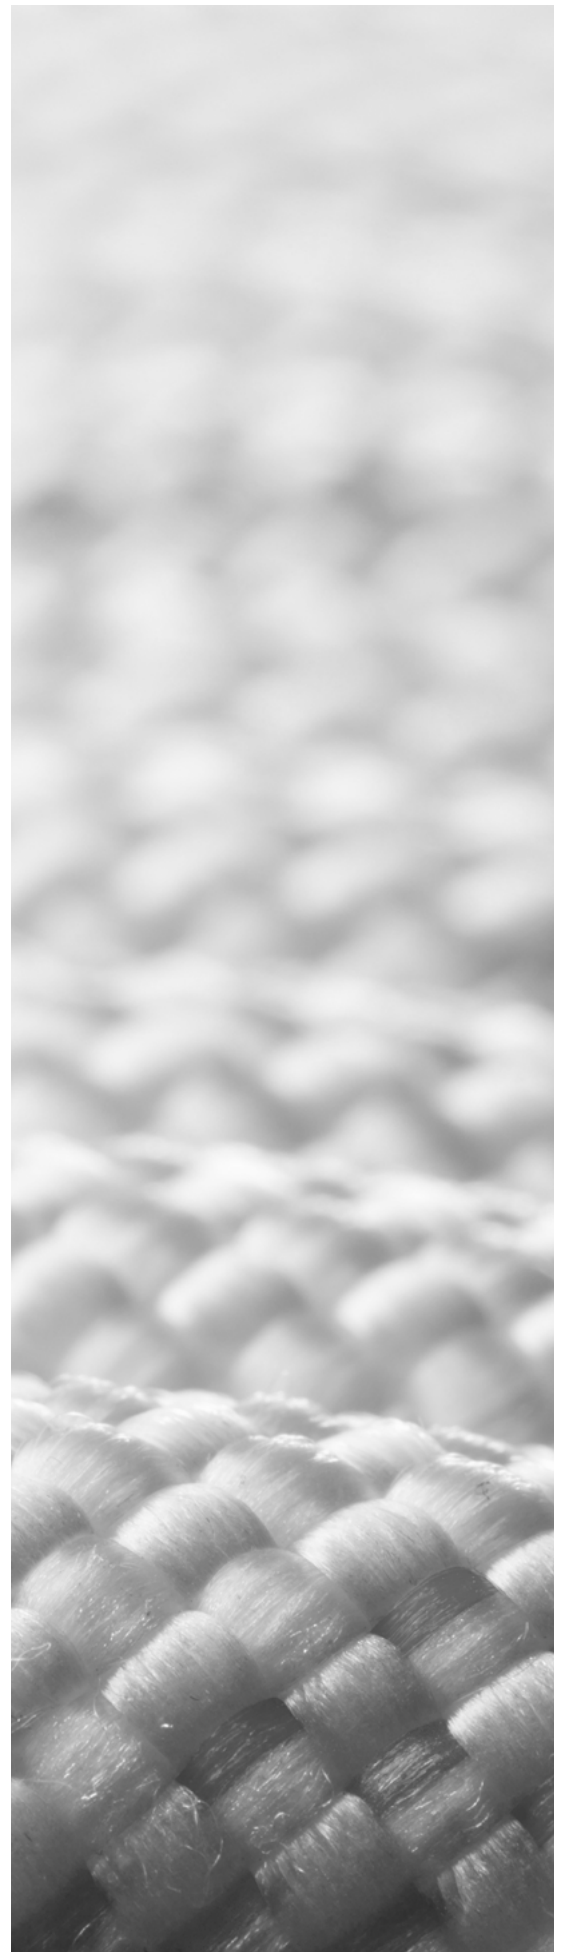

E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

REB ROPE CATALOGUE

Ropes

3 Strand Manila

APPLICATION

- Rigging
- Slings
- Rope ladders
- Cargo nets
- Safety nets
- Lifting
- Block fall ropes
- Capstan ropes
- Driving ropes
- Agriculture
- Decorative knots and detailing

FEATURES

- Low stretch
- Abrasion, weather and microbe resistant
- Biodegradable
- Stronger and more supple than sisal

RANGE

- 5 – 38 mm
- 100 m reels

TECHNICAL

- Material: Manila
- Construction: 3 Strand

3 Strand Nylon

APPLICATION

- Mooring lines
- Anchor warps
- Towing lines
- Fishing lines
- Kinetic ropes
- Parachute anchor lines.

FEATURES

- BS EN 943:2002

RANGE

- 3 – 44mm
- 220 m reels (other sizes available on request)
- Available in white

TECHNICAL

- Material: Nylon
- Construction: 3 strand

3 Strand Polyester

APPLICATION

- Anchor warps
- Mooring warps
- Lanyards
- Fender lines
- Towing lines
- Traditional halyards and ropes
- Net frame ropes
- General-purpose industrial ropes

FEATURES

- BS EN 697:1995
- Strength not affected by water
- Does not shrink
- UV resistant
- Abrasion resistant
- Sinking rope

RANGE

- 6 – 46 mm
 - 220 m reels (other sizes available on request)
- Colours:
- White
 - Navy blue
 - Olive green
 - Burgundy
 - Other colours available on request

TECHNICAL

- Material: HT Polyester
- Construction: 3 strand hawser lay

3 Strand Polyethylene

APPLICATION

- Fishing
- Agriculture
- Truck tie downs
- General purpose industrial use

RANGE

- 4 – 38mm
- 220 m reels (other sizes available on request)
- Available in yellow (other colours available on request)

TECHNICAL

- Material: Polyethylene
- Construction: 3 strand hawser lay

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	6	8	10	12	14	16	18	20	22	24	26	28	30	32	36	38	40	42	44	46	48
3 Strand Manila	260	480	635	955	1285	1805		2845		4070											
3 Strand Nylon	750	1350	2080	3000	4100	5300	6700	8300	10000	12000	13900	15800	17900	20000	24800	27400	30000	33075	36300		39670
3 Strand Polyester	850	1450	2290	3450	4400	6000	7000	8400	10800	12500	14250	16500	18700	20800	25700	28350	35000	38580	42340	46270	
3 Strand Polyethylene	850	1450	2290	3450	4400	6000	7000	840	10800	12500	14250	16500	18700	20800	25700	28350	35000	38580	42340	46270	



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 7

REB ROPE CATALOGUE

Ropes

3 Strand Polyrene

APPLICATION

- Mooring lines
- Anchor warps
- Towing lines
- Frame net ropes
- Foot ropes
- Head lines

FEATURES

- Excellent abrasion resistance
- UV resistant
- Strength not affected by water
- Does not shrink
- Sinking rope

RANGE

- 6 – 46 mm
- 220 m reel size
- Available in white

TECHNICAL

- Material: Polyrene®
- Construction: 3 strand hawser lay

3 Strand Polysteel

APPLICATION

- Fishing
- Agriculture
- Aquaculture
- Long-lining
- Safety nets
- Fishing nets
- Lifting, mooring
- Truck tie downs
- Concrete re-enforcement
- General purpose industrial use

FEATURES

- BS EN 943:2002
- Excellent abrasion resistance
- UV resistant
- Lightweight
- Floats

RANGE

- 6 – 46 mm
- 220 m reels (other colours available on request)

Colours:

- White
- Silver
- Turquoise
- Brick
- Other colours available on request

TECHNICAL

- Material: Polysteel®
- Construction: 3 strand hawser lay

4 Strand Polyester

APPLICATION

- Anchor warps
- Mooring warps
- Rigging aboard tall ships
- Lanyards
- Fender lines
- Towing lines
- Traditional halyards and ropes
- Net frame ropes
- General-purpose industrial ropes

FEATURES

- BS EN 697:1995
- Strength not affected by water
- Does not shrink
- UV resistant
- Abrasion resistant
- Sinking rope

RANGE

- 8 – 26 mm
- 220 m reels (other sizes available on request)
- Available in black and white (other colours available on request)

TECHNICAL

- Material: HT Polyester
- Construction: 4 strand cable lay



Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	8	10	12	14	16	18	20	22	24	26	28	30	32	36	38	40	42	44	46	48	50
3 Strand Polyrene	1400	2100	3000	4100	5200	6600	8100	9500	11400	13200	15000	17000	19000	23560	26000	28500	33075	36300	39670		
3 Strand Polysteel	1360	2035	2900	3905	4910	6300	7600	8900	10490	12320	13900	16000	17500	22080	24350	26860	29613	31780	34734		
4 Strand Polyester														20800	25700	28350	35000		37600		42100 53450



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 8

REB ROPE CATALOGUE

Ropes

4 Strand Polyethylene

APPLICATION

- Fishing
- Agriculture
- Truck tie downs
- General purpose industrial use

RANGE

- 6 – 38mm
- 220 m reels (other sizes available on request)
- Available in yellow (other colours available on request)

TECHNICAL

- Material: Polyethylene
- Construction: 4 strand cable lay

4 Strand Polyrene

APPLICATION

- Mooring lines
- Anchor warps
- Towing lines
- Frame net ropes
- Foot ropes
- Head lines

FEATURES

- Excellent abrasion resistance
- UV resistant
- Strength not affected by water
- Does not shrink
- Sinking rope

RANGE

- 8 – 46 mm
- 220 m reel size
- Available in white

TECHNICAL

- Material: Polyrene®
- Construction: 4 strand cable lay

4 Strand Polysteel

APPLICATION

- Fishing
- Agriculture
- Aquaculture
- Long-lining
- Safety nets
- Fishing nets
- Lifting, mooring
- Truck tie downs
- Concrete re-enforcement
- General purpose industrial use

FEATURES

- BS EN 943:2002
- Excellent abrasion resistance
- UV resistant
- Lightweight
- Floats

RANGE

- 8 – 26 mm
- 220 m reels (other colours available on request)

Colours:

- White
- Silver
- Turquoise
- Brick
- Other colours available on request

TECHNICAL

- Material: Polysteel®
- Construction: 4 strand cable lay

8 Strand Nylon

APPLICATION

- Mooring lines
- Anchor warps
- Towing lines
- Fishing lines
- Kinetic ropes
- Parachute anchor lines.

FEATURES

- BS EN 943:2002

RANGE

- 12 – 120mm
- 220 m reels (other sizes available on request)
- Available in white

TECHNICAL

- Material: Nylon
- Construction: 8 strand

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	6	8	10	12	14	16	18	20	22	24	26	28	30	32	36	38	40	42	44	46	48
4 Strand Polyethylene	850	1450	2290	3450	4400	6000	7000	8400	10800	12500	14250	16500	18700	20800	25700	28350	35000	38580	42340	46270	
4 Strand Polyrene		1400	2100	3000	4100	5200	6600	8100	9500	11400	13200	15000	17000	19000	23560	26000	28500	33075	36300	39670	
4 Strand Polysteel	770	1360	2035	2900	3905	4910	6300	7600	8900	10490	12320	13900	16000	17500	22080	24350	26860	29613	31780	34734	
8 Strand Nylon																	30000		35800		42100



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 9

REB ROPE CATALOGUE

Ropes

8 Strand Polyester

APPLICATION

- Anchor warps
- Mooring warps
- Lanyards
- Fender lines
- Towing lines
- Traditional halyards and ropes
- Net frame ropes
- General-purpose industrial ropes

RANGE

- 32 – 100 mm
- 220 m reels (other sizes available on request)
- Available in white (other colours available on request)

FEATURES

- BS EN 697:1995
- Strength not affected by water
- Does not shrink
- UV resistant
- Abrasion resistant
- Sinking rope

TECHNICAL

- Material: HT Polyester
- Construction: 8 strand plait



8 Strand Polyrene

APPLICATION

- Mooring lines
- Anchor warps
- Towing lines
- Frame net ropes
- Foot ropes
- Head lines

FEATURES

- Excellent abrasion resistance
- UV resistant
- Strength not affected by water
- Does not shrink
- Sinking rope

RANGE

- 32 – 100 mm
- 220 m reel size
- Available in white

TECHNICAL

- Material: Polyrene®
- Construction: 8 strand plait

8 Strand Polysteel

APPLICATION

- Fishing
- Agriculture
- Aquaculture
- Long-lining
- Safety nets
- Fishing nets
- Lifting, mooring
- Truck tie downs
- Concrete re-enforcement
- General purpose industrial use

FEATURES

- BS EN 943:2002
- Excellent abrasion resistance
- UV resistant
- Lightweight
- Floats

RANGE

- 32 – 100 mm
- 220 m reels (other colours available on request)

Colours:

- White
- Silver
- Turquoise
- Brick
- Other colours available on request

TECHNICAL

- Material: Polysteel®
- Construction: 8 strand plait

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	32	36	40	44	50	56	60	64	68	72	76	80	84	88	92	96	100
8 Strand Polyester	20800	25700	35000	37600	53450	59800	68600	81000	89000	99000	104000	116000	125000	135000	147550	160600	174300
8 Strand Polyrene	19000	23560	28500	34000	43100	53200	6000	68400	76000	85000	95000	104000	114000	123000	130000	142000	153000
8 Strand Polysteel	17500	22080	26860	31780	40000	49380	56680	64100	72062	80225	88000	99050	106000	112000	122415	133200	144600



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 10

REB ROPE CATALOGUE

Ropes



12 Strand Nylon

APPLICATION

- Mooring lines
- Anchor warps
- Towing lines
- Fishing lines
- Kinetic ropes
- Parachute anchor lines.

FEATURES

- Excellent stretch and recovery characteristics

RANGE

- 12 – 56 mm
- 220 m reels (other sizes available on request)
- Available in white

TECHNICAL

- Material: Nylon
- Construction: 12 strand



12 Strand Polyester

APPLICATION

- Anchor warps
- Mooring warps
- Lanyards
- Fender lines
- Towing lines
- Traditional halyards and ropes
- Net frame ropes
- General-purpose industrial ropes

FEATURES

- BS EN 697:1995
- Strength not affected by water
- Does not shrink
- UV resistant
- Abrasion resistant
- Sinking rope

RANGE

- 8 – 60 mm
- 220 m reels (other sizes available on request)
- Available in black and white (other colours available on request)

TECHNICAL

- Material: HT Polyester
- Construction: 12 strand plait



12 Strand Polyrene

APPLICATION

- Mooring lines
- Anchor warps
- Towing lines
- Frame net ropes
- Foot ropes
- Head lines

FEATURES

- Excellent abrasion resistance
- UV resistant
- Strength not affected by water
- Does not shrink
- Sinking rope

RANGE

- 8 – 60 mm
- 220 m reel size
- Available in white

TECHNICAL

- Material: Polyrene®
- Construction: 12 strand plait



12 Strand Polysteel

APPLICATION

- Fishing
- Agriculture
- Aquaculture
- Long-lining
- Safety nets
- Fishing nets
- Lifting, mooring
- Truck tie downs
- Concrete re-enforcement
- General purpose industrial use

FEATURES

- BS EN 943:2002
- Excellent abrasion resistance
- UV resistant
- Lightweight
- Floats

RANGE

- 18 – 60 mm
- 220 m reels (other colours available on request)

Colours:

- White
- Silver
- Turquoise
- Brick
- Other colours available on request

TECHNICAL

- Material: Polysteel®
- Construction: 12 strand plait

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	8	10	12	14	16	18	20	22	24	26	28	30	32	36	38	40	44	48	50	56	60
12 Strand Nylon	1485	2288	3300	4510	5830	7370	9130	11000	13200	15290	17380	19690	22000	27280	30140	33000	39380	46200	49940	61600	
12 Strand Polyester	1595	2519	3795	4840	6600	7700	8140	11880	13750	15675	18150	20570	22880	28270	31185	38500	41360	58795	58795	65780	75460
12 Strand Polyrene	1540	2310	3300	4510	5720	7260	8910	10450	12540	14520	16500	18700	20900	25916	28600	31350	37400	44000	47410	58520	66000
12 Strand Polysteel						6930	8360	9790	11539	13552	15290	17600	19250	24288	26785	29546	34958	40898	44000	54318	62384



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 11

REB ROPE CATALOGUE

Ropes

24 Strand Polyrene

APPLICATION

- Mooring lines
- Anchor warps
- Towing lines
- Frame net ropes
- Foot ropes
- Head lines

FEATURES

- Excellent abrasion resistance
- UV resistant
- Strength not affected by water
- Does not shrink
- Sinking rope

RANGE

- 20 – 44 mm
- 220 m reel size
- Available in white

TECHNICAL

- Material: Polyrene®
- Construction: 24 strand plait



24 Strand Polysteel

APPLICATION

- Fishing
- Agriculture
- Aquaculture
- Long-lining
- Safety nets
- Fishing nets
- Lifting, mooring
- Truck tie downs
- Concrete re-enforcement
- General purpose industrial use

FEATURES

- BS EN 943:2002
- Excellent abrasion resistance
- UV resistant
- Lightweight
- Floats

RANGE

- 20 – 40 mm
- 220 m reels (other colours available on request)

Colours:

- White
- Silver
- Turquoise
- Brick
- Other colours available on request

TECHNICAL

- Material: Polysteel®
- Construction: 24 strand plait

Anchor Braid

APPLICATION

- Anchor lines
- Mooring lines
- Towing lines
- Drogue lines
- Children's toys

FEATURES

- Low stretch
- High tenacity and abrasion resistance
- High resistivity to UV and most chemicals

RANGE

- 8 – 18 mm
- 20 kg reels
- Available in white
- BS/EN 71-2:2003 (Flammability)
- BS/EN 71-3:1995 including A1:2000, for use in children toys.

TECHNICAL

- Material: HT Polyester
- Construction: 8 strand single braid

Anti-Torsion Braid

APPLICATION

- Furlers

FEATURES

- Low twist
- High tensile strength
- Negligible elongation

RANGE

- 9 – 14 mm
- Gold colour

TECHNICAL

- Cover: Heracron
- Core: Vectran® / HT Polyester
- Construction: Braid-on-braid

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	8	9	10	11	12	13	14	18	22	26	28	30	32	36	38	40	44	48	50	56
24 Strand Polyrene	1540		2310		3300		4510	7260	10450	14520	16500	18700	20900	25916	28600	31350	37400	44000	47410	58520
24 Strand Polysteel	1496		2238		3190		4295	6930	9790	13552	15290	17600	19250	24288	26785	29546	34958	40898	44000	
Anchor Braid			1200		1500															
Anti-Torsion Braid		3000		5800		9000														



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 12

REB ROPE CATALOGUE

Ropes

Basket Braid

APPLICATION

- Cargo nets
- General purpose

FEATURES

- Lightweight
- Durable
- Floats

RANGE

- 5 – 6 mm available in 1 kg reels
- 7 – 25 mm available in 100 m reels
- Available in solid colours and white/colour combinations

TECHNICAL

- Material: Polyethylene
- Construction: Single braid



Chafe Covers

APPLICATION

- Protection of sheets and other ropes in high abrasion applications

FEATURES

- Abrasion Resistance:
- UHMwPE ****
 - Vectran *****
 - Technora *****
 - UV Stability:
 - UHMwPE *****
 - Vectran ***
 - Technora ***

RANGE

- 6 – 8 mm
- 10 – 12 mm
- 14 – 16 mm
- 18 – 20 mm

TECHNICAL

- Material: UHMwPE OR Vectran® OR Technora®
- Construction: Single cover braid

Dock Line

APPLICATION

- Mooring lines
- Fender lines
- Painter lines

FEATURES

- Durable
- Excellent stretch recovery
- Easy to handle
- Easy stowing

RANGE

- 10 – 36 mm
- 220 m reel
- Available in solid colours: Black, Navy and White

TECHNICAL

- Cover: HT Polyester
- Core: Nylon
- Construction: Braid-on-braid

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	4	9	11	14	17	24
Basket Braid	110					
Chafe Covers						
Dock Line		2550	3500	6420	8100	15600



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 13

REB ROPE CATALOGUE

Ropes



Dynaline

APPLICATION

- Towlines
- Mooring lines
- Wire rope replacement

FEATURES

Abrasion Resistance:

- UHMwPE ****
- Technora® ****
- Vectran® *****
- Multi-Filament Polypropylene **
- Nylon ****
- Polyester ***
- Polyethylene **

Tensile Strength:

- UHMwPE ****
- Technora® *****
- Vectran® *****
- Multi-Filament Polypropylene **
- Nylon ***
- Polyester ***
- Polyethylene **

UV Rating:

- UHMwPE *****
- Technora® ***
- Vectran® ***
- Multi-Filament Polypropylene ****
- Nylon ****
- Polyester *****
- Polyethylene ****

RANGE

- 20 – 40 mm
- Cover Fibre Choices:
 - UHMwPE
 - Technora®
 - Vectran®
 - Multi-Filament Polypropylene
 - Nylon
 - Polyester
 - Polyethylene
- (Combinations of the above are also available)
- Colour depends on fibre choice (custom colours only available with Multi-Filament Polypropylene, Nylon, Polyester and Polyethylene)

TECHNICAL

- Cover: Custom
- Core: Super 12 UHMwPE
- Construction: Braid-on-braid



Dynalock

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Kickers
- Reefing Lines

FEATURES

- Low stretch
- Abrasion resistant

RANGE

- 4 – 6 mm
- 200 m reel
- Available in a black, blue and yellow colour combination

TECHNICAL

- Cover: HT Polyester
- Core: Super 12
- Construction: Braid-on-braid, Heatset



Dynamic Access Rope

APPLICATION

- Climbing
- Fall arrest

FEATURES

- Shock absorbent
- Good handling characteristics

RANGE

- 11.0 mm
- 200 m reel
- 11mm is CE Certified and EN 892
- Available in multiple colour combinations

TECHNICAL

- Cover: Nylon
- Core: Nylon
- Construction: Braid over parallel core

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	4	5	6	7	8	9	10	12	13	14	16	17	18	20	22	24
Dynaline	880	1330	1770	3100	3990	5320	6660	9760		12600	17640		21380	25340	30090	35640
Dynalock																
Dynamic Access Rope																



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 14

REB ROPE CATALOGUE

Ropes



Fast Rope

APPLICATION

- Rapid deployment of personnel
- Transportation and evacuation of personnel
- Special Forces

RANGE

- 40 mm
- Length as per request
- Available in black

FEATURES

- Good grip
- Strength not affected by water
- Does not shrink
- UV resistant
- Abrasion resistant
- Soft eye splice on one end

TECHNICAL

- Construction: 12 strand



GP 12

APPLICATION

- Wire rope replacement
- Halyards
- Check stays
- Guys
- Runner Tails
- Kickers
- Strops
- Towlines
- Winch lines

FEATURES

- Extremely high strength-to-weight ratio
- Safer than wire (low recoil)
- Floats
- Hydrophobic
- Low creep
- Easy to splice
- Resistance to kinking
- Very high resistivity to UV and most chemicals
- Coating reduces likelihood of snagging

RANGE

- 2 - 24 mm (larger diameters available on request)
- 200 m reel
- Dark charcoal colour

TECHNICAL

- Material: Heat-set Dyneema® with polyurethane coating
- Construction: 12 strand single braid



GP Braid

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Guys
- Runner Tails
- Kickers
- Reefing Lines
- Furlers
- Travellers

FEATURES

- Light weight
- Ultra-low stretch
- UV resistant core
- Abrasion resistant cover

RANGE

- 2 - 24 mm (larger diameters available on request)
- 200 m reel
- Available in mottled colours

TECHNICAL

- Cover: HT Polyester
- Core: GP 12 Dyneema®
- Construction: Braid-on-braid

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	3	4	5	6	7	8	9	10	11	12	14	16	18	20	22	24	40
Fast Rope																	35000
GP 12	1580	2640	3690	4750	6330	7920	10030	11610	13720	15120	21160	27210					
GP Braid		1000	1500	2100	3600	4700	6300	7900		11600	15000	21000	27200	32200	38300	45300	



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 15

REB ROPE CATALOGUE

Ropes

GP-T Braid

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Guys
- Runner Tails
- Kickers
- Reefing Lines
- Furlers
- Travellers

RANGE

- 2 – 24 mm (larger diameters available on request)
- 200 m reels
- Available in black Technora® with colour mottle

FEATURES

- 500°C decomposition temperature of Technora®
- Good grip around blocks and in cleats
- Ultra-low stretch
- Low creep

TECHNICAL

- Cover: Technora®/HT Polyester blend
- Core: GP 12 Dyneema®
- Construction: Braid-on-braid



Kinetic Tow Rope

APPLICATION

- Dynamic vehicle recovery
- Tow rope

FEATURES

- Shock absorbing
- Soft

RANGE

- 20 – 80 mm
- Soft eye splices on each end
- Available in white

TECHNICAL

- Material: Nylon
- Construction: 12 strand

Marstrand Yacht Braid

APPLICATION

- Sheets
- Rescue lines

FEATURES

- Soft and easy to handle
- Lightweight
- Floats
- Hydrophobic
- UV resistant

RANGE

- 6 – 10 mm
- 200 m reel
- Colours:
- 8 Plait:
- Red/white mottle
- Blue/white mottle
- Black/white mottle
- Yellow/white mottle
- 16 Plait:
- Black with red fleck
- Red with yellow fleck
- Blue with yellow fleck
- Yellow with green fleck

TECHNICAL

- Material: Multi-filament polypropylene
- Construction: 8 plait, 16 plait braid

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	4	6	7	8	9	10	12	14	16	18	20	22	24	36	40	48	52	60	68	80
GP-T Braid	1000	2100	3600	4700	6300	7900	11600	15000	21000	27200	32200	38300	45300							
Kinetic Tow Rope											8300		12000	24800	30000	42000	48800	63800	78500	110000
Marstrand Yacht Braid	1450	3360		7680																



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 16

REB ROPE CATALOGUE

Ropes

Mixed Braid

APPLICATION

- Net repair
- General purpose

FEATURES

- Durable

RANGE

- 4 – 6 mm available in 1 kg reels
- 10 mm available in 10 kg reels
- Available in different colour combinations

TECHNICAL

- Material: Polyester/polyethylene mix
- Construction: Single braid

Multifilament Polypropylene Braid

APPLICATION

- General purpose
- Draw cords
- Decorative cords
- Retaining cords
- Tie-downs
- Light duty control lines

FEATURES

- Lightweight
- Soft hand
- Floats

RANGE

- 2 – 16 mm
- 200 m reel
- Available in solid colours and colour combinations

TECHNICAL

- Round:
- Cover: MF Polypropylene
- Core: MF Polypropylene
- Construction: Braid-on-twist
- Flat:
- Cover: MF Polypropylene
- Core: None
- Construction: Single braid

Nomex Yacht Braid

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Guys
- Runner Tails
- Kickers
- Reefing Lines
- Furlers
- Travellers

FEATURES

- 400°C decomposition temperature
- Good grip around blocks and in cleats
- Ultra-low stretch
- Soft hand

RANGE

- 2 – 24 mm (larger diameters available on request)
- 200 m reel
- Available in mottled colours

TECHNICAL

- Cover: Nomex®
- Core: GP 12 OR Super 12
- Construction: Braid-on-braid

Nylon Braid

APPLICATION

- General purpose
- Draw cords
- Decorative cords
- Retaining cords
- Tie-downs

FEATURES

- Lightweight
- Give and recovery

RANGE

- 2 – 5 mm
- 1 kg reels
- Available in solid colours

TECHNICAL

- Round:
- Cover: Polyethylene
- Core: Polyethylene
- Construction: Braid-on-twist
- Flat:
- Cover: Polyethylene
- Core: None
- Construction: Single braid

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	1.5	2	3	4	5	6	7	8	9	10	11	12	14	16	17	18	20
Mixed Braid																	
Multifilament Polypropylene Braid		110	200	325	420	500											
Nomex Yacht Braid		1050	1580	2640	3690	4750	6330	7920	10030	11610	13720	15120	21160	27210	32250	38300	45360
Nylon Braid	44	143	300	480	566	660	850	1050		1250		1600					



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 17

REB ROPE CATALOGUE

Ropes

Pilot Rope

APPLICATION

- Pulling transmission lines/overhead conductors
- Pulling ropes

FEATURES

- Rigid construction
- Low stretch
- Abrasion resistant
- UV resistant

RANGE

- 12, 14 and 16 mm
- Length as per request
- Available in white with colour marker

TECHNICAL

- Cover: HT Polyester
- Core: HT Polyester
- Construction: Braid-on-braid

Polyester Braid

APPLICATION

- Control lines
- Leader lines
- Flag halyards
- Tie-downs
- Blind cords
- Awning cords
- Messenger lines
- Utility lines
- Net repair
- General purpose

FEATURES

- Round:
- Rigid construction
 - Low stretch
 - Abrasion resistant
 - UV resistant
- Flat:
- Supple
 - Easy knot tying
 - Low stretch (but more than round equivalent)
 - Abrasion resistant
 - UV resistant

TECHNICAL

- Round:
- Cover: HT Polyester
 - Core: HT Polyester
 - Construction: Braid-on-twist
- Flat:
- Cover: HT Polyester
 - Core: None
 - Construction: Single braid

RANGE

- 1 – 6 mm available in 1 kg reels
- 7 – 10 mm available in 10 kg reels
- 12 – 24 mm available in 20 kg reels
- Available in solid colours, white with colour flecks and different colour combinations



Polyester Yacht Braid

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Guys
- Runner Tails
- Kickers
- Reefing Lines
- Furlers
- Travellers

FEATURES

- Low stretch
- High tenacity and abrasion resistance
- High resistivity to UV and most chemicals

RANGE

- 2 – 24 mm
- 200 m reel
- Available in solid colours and white with colour markers

TECHNICAL

- Cover: HT Polyester
- Core: HT Polyester
- Construction: Braid-on-braid

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	2	3	4	5	6	7	8	10	12	14	16	18	20
Pilot Rope							140	2100	3000	3900	5500	6000	
Polyester Braid	150	300	480	540	700	950	1255	1935	2790	3800	4930	6230	7720
Polyester Yacht Braid							1700	2350	3250	4200	5600	7800	



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 18

REB ROPE CATALOGUE

Ropes

Polyethylene Braid

APPLICATION

- General purpose
- Draw cords
- Retaining cords
- Tie-downs

FEATURES

- Lightweight
- Durable
- Floats

RANGE

- 2.5 – 6.0 mm available in 1 kg reels
- 16 – 24 mm available in 100 m reels
- Available in solid colours

TECHNICAL

Round:

- Cover: Polyethylene
- Core: Polyethylene
- Construction: Braid-on-twist

Flat:

- Cover: Polyethylene
- Core: None
- Construction: Single braid

Polylock

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Kickers
- Reefing Lines

FEATURES

- Low stretch
- Abrasion resistant

RANGE

- 4 – 6 mm
- 200 m reel
- Colours:
- Black, red and white
- Blue, black and white
- Grey, black and white

TECHNICAL

- Cover: HT Polyester
- Core: HT Polyester
- Construction: Braid-on-braid, Heat set

Prusik Braid

APPLICATION

- Climbing
- Access work

FEATURES

- Abrasion resistant
- Rigid construction

RANGE

- 5 – 8 mm
- 200 m reel
- Available in different colour combinations

TECHNICAL

- Cover: HT Polyester
- Core: HT Polyester
- Construction: Braid-on-twist

Response Hot Line

APPLICATION

- Abseiling
- Belay
- Access line
- Static descent

FEATURES

- Decomposition temperature of 500°C
- High abrasion resistance
- High chemical resistivity

RANGE

- 11 mm
- 200 m reel
- Gold colour

TECHNICAL

- Cover: Technora®
- Core: Nylon
- Construction: Braid-on-braid



Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	2	3	4	5	6	7	8	10	10.5	11	12
Polyethylene Braid	110	200	325	420	80						
Polylock			360	590	780	1350					
Prusik Braid	150	300	480	540	700	950	1255	1935			2790
Response Hot Line										2900	



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 19

REB ROPE CATALOGUE

Ropes



Response L.S.K.

APPLICATION

- Static descent
- Speleology
- Belay
- Abseiling
- Rescue line
- Safety line
- Access line

FEATURES

- Low stretch
- Abrasion resistant
- 10.5 & 11.0 mm are CE certified and complies with EN 1891

RANGE

- 10.5, 11.0, 13.0 mm
- 200 m reels
- Available in solid colours and white with colour markers

TECHNICAL

- Cover: HT Polyester
- Core: Nylon
- Construction: Braid-on-braid



Riggers Yacht Braid

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Guys
- Runner Tails
- Kickers
- Reefing Lines
- Furlers
- Travellers

FEATURES

- Easy splicing
- High tenacity and abrasion resistance
- High resistivity to UV and most chemicals

RANGE

- 2 -24 mm (larger diameters available on request)
- 200 m reel
- Available in solid colours and white with colour markers

TECHNICAL

- Cover: HT Polyester
- Core: HT Polyester
- Construction: Braid-on-braid



Sheet Line

APPLICATION

- Laser mainsheet

FEATURES

- Grippy hard wearing polyester cover
- Low water absorption
- Good strength

RANGE

- 6mm
- Reel size: 200 m
- Available in mottled red

TECHNICAL

- Cover: Polyester and spun polyester
- Core: 12 Strand UHMWPE
- Construction: Braid-on-braid



Sheet Line Light

APPLICATION

- Laser mainsheet

FEATURES

- Hydrophobic cover
- Low water absorption
- Good strength

RANGE

- 5.5mm
- Reel size: 200 m
- Available in mottled yellow

TECHNICAL

- Cover: Multifilament polypropylene and spun polyester
- Core: 12 Strand UHMWPE and Multifilament polypropylene
- Construction: Braid-on-braid

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	2	3	4	5	6	7	8	10	10.5	11	12	14	16	18
Response L.S.K.									2300	3100				
Riggers Yacht Braid							1700	2350			3250	4200	5600	7800
Sheet Line					720									
Sheet Line Light	120	250	375	490	720	700	900							



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page20

REB ROPE CATALOGUE

Ropes

Shock Cord



APPLICATION

- Securing
- Tie-downs
- Nets

FEATURES

- 100% stretch
- Excellent recovery from stretch

RANGE

- 3 – 10 mm
- 100 m reels
- Available in solid colours and white with colour markers

TECHNICAL

- Cover: Polyester
- Core: Rubber
- Construction: Braid over parallel core

Ski Rope



APPLICATION

- Towing rope for water sports
- Rescue line
- Nets
- Tie-downs
- General purpose

FEATURES

- Loose construction promotes easy splicing
- Lightweight
- Durable
- Floats

RANGE

- 5 – 18 mm
- 100 m reels
- Available in solid colours and white colour combinations

TECHNICAL

- Material: Polyethylene
- Construction: Single braid

Spec-12



APPLICATION

- Wire rope replacement
- Halyards
- Check stays
- Guys
- Runner Tails
- Kickers
- Strops
- Towlines
- Winch lines

FEATURES

- Extremely high strength-to-weight ratio
- Safer than wire (low recoil)
- Floats
- Hydrophobic
- Low creep
- Easy to splice
- Resistance to kinking
- Very high resistivity to UV and most chemicals

RANGE

- 2 – 9 mm
- 200 m reel
- Available raw or with polyurethane coating*
- The coating increases the abrasion resistance as well as the life of the rope and is available in different colours.

TECHNICAL

- Material: UHMwPE
- Construction: 12 strand single braid
- Also available in 8 and 10 strand constructions

Spectraspeed



APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Guys
- Runner Tails
- Kickers
- Reefing Lines
- Furlers
- Travellers

FEATURES

- Light weight
- Ultra-low stretch
- UV resistant core
- Polyester sheath prevents block and jammer slippage

RANGE

- 2 – 24 mm (larger diameters available on request)
- 200 m reel
- Available in different colours with a black marker

TECHNICAL

- Cover: HT Polyester
- Core: 12 strand UHMwPE
- Construction: Braid-on-braid

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	1.5	1.7	2	2.5	3	3.5	4	5	6	7	8	9	10	12
Shock Cord														
Ski Rope														
Spec-12	250	400	600	750	900	1300	1770	2200	3000	3900	5500	6600		
Spectraspeed			280		440		600	1000	1300		3000		5300	7000



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 21

REB ROPE CATALOGUE

Ropes

Spun Polyester Sheet Line



APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Guys
- Runner Tails
- Kickers
- Reefing Lines
- Furlers
- Travellers

RANGE


- 6 – 14 mm
- 200 m reel
- Available in white with colour markers

FEATURES

- Soft hand
- Easy cleating/un-cleating
- High tenacity and abrasion resistance
- High resistivity to UV and most chemicals

TECHNICAL

- Cover: Spun Polyester
- Core: HT Polyester
- Construction: Braid-on-braid

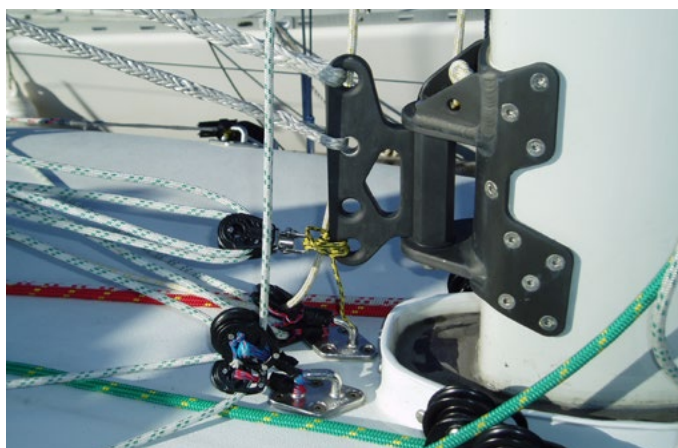

Super 8



APPLICATION

- Wire rope replacement
- Towlines
- Winch lines

FEATURES

- Extremely high strength-to-weight ratio
- Safer than wire (low recoil)
- Floats
- Hydrophobic
- Low creep
- Easy to splice
- Resistance to kinking
- Very high resistivity to UV and most chemicals
- Coating reduces likelihood of snagging

RANGE

- 20mm – 64mm
- Custom lengths on request
- Available in white with polyurethane coating

TECHNICAL

- Material: Heat-set UHMwPE with polyurethane coating
- Construction: 8 strand single braid

Super 12



APPLICATION

- Wire rope replacement
- Halyards
- Check stays
- Guys
- Runner Tails
- Kickers
- Strops
- Towlines
- Winch lines

FEATURES

- Extremely high strength-to-weight ratio
- Safer than wire (low recoil)
- Floats
- Hydrophobic
- Low creep
- Easy to splice
- Resistance to kinking
- Very high resistivity to UV and most chemicals
- Coating reduces likelihood of snagging

RANGE

- 2 – 24 mm (larger diameters available on request)
- 200 m reel
- Light charcoal colour

TECHNICAL

- Material: Heat-set UHMwPE with polyurethane coating
- Construction: 12 strand single braid

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	2	3	3.5	4	6	8	10	11	12	14	16	18	20
Spun Polyester Sheet Line					800	1500	2000		2850	3750			
Super 12	880	1330	1770	2220	3990	6660	9760	11540	12600	17640	21380	30090	35640
Super 8													



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 22

REB ROPE CATALOGUE

Ropes

Super Lite

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Kickers
- Reefing Lines

FEATURES

- Ultra-low stretch
- Abrasion resistant

RANGE

- 2 - 6 mm
- 100 m reel
- Available in multiple colour combinations

TECHNICAL

- Cover: HT Polyester
- Core: HT Polyester / UHMWPE
- Construction: Braid-on-twist

Superbraid

APPLICATION

- Control Lines
- Tow Lines
- Winch Lines
- Wire rope Replacement

FEATURES

- Light weight
- Ultra-low stretch
- UV resistant core
- Polyester sheath prevents block and jammer slippage

RANGE

- 2 - 30 mm (larger diameters available on request)
- 200 m reel
- Available in mottled colours

TECHNICAL

- Cover: HT Polyester
- Core: Super 12 UHMWPE
- Construction: Braid-on-braid

Super-T Braid

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Guys
- Runner Tails
- Kickers
- Reefing Lines
- Furlers
- Travellers

FEATURES

- 500°C decomposition temperature of Technora®
- Good grip around blocks and in cleats
- Ultra-low stretch
- Low creep

RANGE

- 2 - 24 mm (larger diameters available on request)
- 200 m reels
- Available in black with colour mottle

TECHNICAL

- Cover: Technora®/HT Polyester blend
- Core: Super 12 UHMWPE
- Construction: Braid-on-braid

Technora Braid

APPLICATION

- Stunt work
- Fire fighting

FEATURES

- Decomposition temperature of 500°C
- High abrasion resistance
- High chemical resistivity

RANGE

- 4 - 12 mm
- 100 m reel
- Available in gold or black

TECHNICAL

- Round:
- Cover: Technora®
 - Core: Technora®
 - Construction: Braid-on-twist
- Flat:
- Cover: Technora®
 - Core: None
 - Construction: Single braid

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	3	4	5	6	7	8	9	10	12	14	16	18	20	22	24
Super Lite	175	300	450	500											
Superbraid		880	1330	1770	3100	3990	5320	6660	9760	12600	17640	21380	25340	30090	35640
Super-T Braid		880	1330	1770	3100	3990	5320	6660	9760	12600	17640	21380	25340	30090	35640
Technora Braid															



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 23

REB ROPE CATALOGUE

Ropes

Technora Lite

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Kickers
- Reefing Lines

FEATURES

- Low stretch
- Abrasion resistant

RANGE

- 2 – 7 mm
- 100 m reel
- Available in multiple colour combinations

TECHNICAL

- Cover: HT Polyester
- Core: HT Polyester / Technora® blend
- Construction: Braid-on-twist

Titan Yacht Braid

APPLICATION

- Control Lines
- Sheets
- Halyards
- Out/downhauls
- Kickers
- Reefing Lines

FEATURES

- Abrasion resistant
- UV resistant
- Low friction
- Ultra-low stretch
- Low creep

RANGE

- 2 – 6 mm
- 100 m reels
- Available in white with black marker

TECHNICAL

- Cover: UHMwPE
- Core: HT Polyester
- Construction: Braid-on-braid

UHMwPE Kite Line

APPLICATION

- Kite line

FEATURES


- High tensile strength
- Lightweight

RANGE

- 90 kg (0.5 mm)
- 180 kg (1.0 mm)
- 320 kg (1.5 mm)
- Available in raw (white) or with polyurethane coating* (black)
- The coating increases the abrasion resistance as well as the life of the rope.

TECHNICAL

- Material: UHMwPE
- Construction Single braid

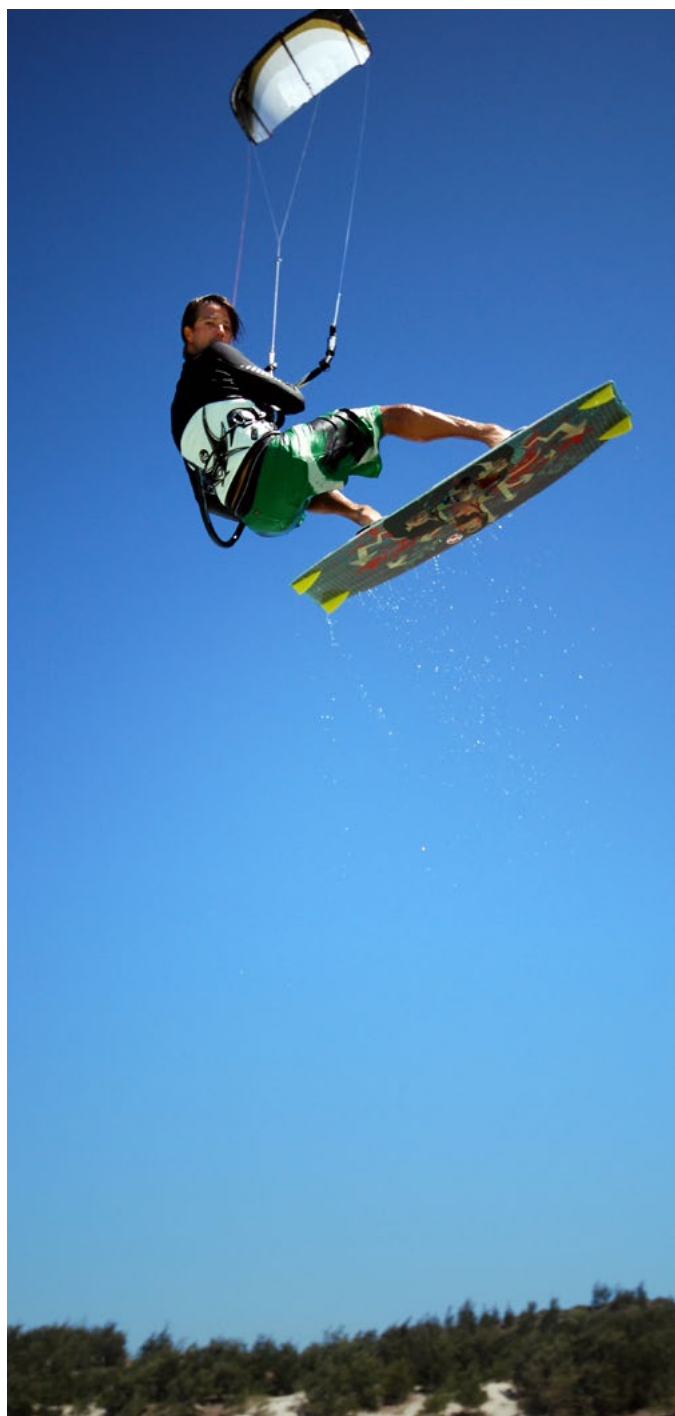

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	0.5	1	1.5	3	4	5
Technora Lite						
Titan Yacht Braid				400	500	720
UHMwPE Kite Line	90	180	320			



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page24

REB ROPE CATALOGUE

Ropes



Vec 12

APPLICATION

- Halyards
- Check stays
- Guys
- Runner Tails
- Kickers
- Strops

FEATURES

- Ultra-low stretch
- Zero creep
- Extremely high strength-to-weight ratio
- High abrasion resistance
- High heat resistance
- Easy to splice
- Does not float

RANGE

- 1.5 – 38.0 mm
- 200 m reel
- Available in natural gold colour with purple marker

TECHNICAL

- Material: Vectran®
- Construction: Single braid



Veclock

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Kickers
- Reefing Lines

RANGE


- 4 – 6 mm
- 200 m reel
- Available in a black, red and yellow colour combination

FEATURES

- Low stretch
- Abrasion resistant

TECHNICAL

- Cover: HT Polyester
- Core: Vec 12
- Construction: Braid-on-braid, Heat set

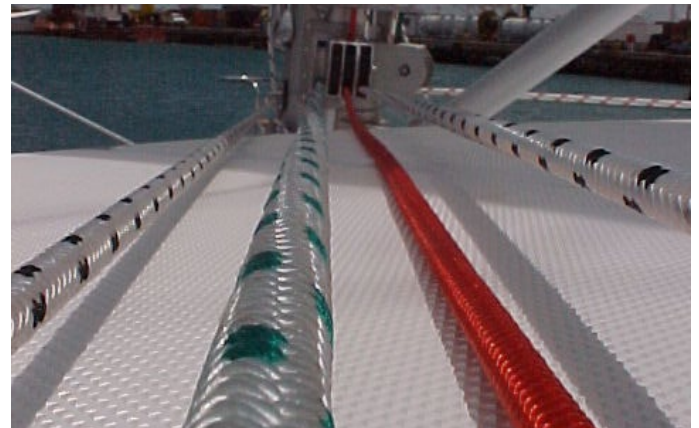

Vectran Lite

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Kickers
- Reefing Lines

FEATURES

- Ultra-low stretch
- Abrasion resistant

RANGE

- 2 mm
- 100 m reel
- Available in multiple colour combinations

TECHNICAL

- Cover: HT Polyester
- Core: HT Polyester / Vectran®
- Construction: Braid-on-twist



Vectran Yacht Braid

APPLICATION

- Sheets
- Halyards
- Control Lines
- Out/downhauls
- Guys
- Runner Tails
- Kickers
- Reefing Lines
- Furlers
- Travellers

FEATURES

- Extremely high strength-to-weight ratio
- Ultra-low stretch
- Zero creep
- Polyester sheath prevents block and jammer slippage
- High abrasion resistance

RANGE

- 2 – 18 mm
- 200 m reel
- Available in solid colours and colour with different colour markers

TECHNICAL

- Cover: HT Polyester
- Core: Vec 12 Vectran®
- Construction: Braid-on-braid

Break loads

Average break load in kilograms and diameter in millimeters. More break loads available on request.

Diameter	2	3	4	5	6	8	10	12	14	16	18	20	22	24
Vec 12	750	1200	1800	2400	3400	6200	6800	12600	17000	22500	28500	35000		
Veclock			350	540	770									
Vectran Lite			350	540	770									
Vectran Yacht Braid						3650	5840	7500	10100	11950	14500	18800	21500	25300



E&OE & T&C's apply

www.rebmarketing.co.za | +27 11 452 9131

Page 25

REB ROPE CATALOGUE